

Products Covered by This Manual



CLUX1A

Recommended shoelace


**2.0 mm-2.5mm diameter
Non-Elastic cord**

HOW TO ASSEMBLE

■ **Part & Detail** ■




■ **NOTE** ■

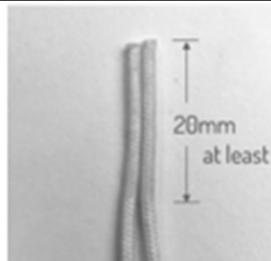


Since the Case-part of the CLUX1A has a length of 20 mm, it will be difficult to assemble if the lace-tip is shorter than 20 mm.

■ **STEP 1** ■

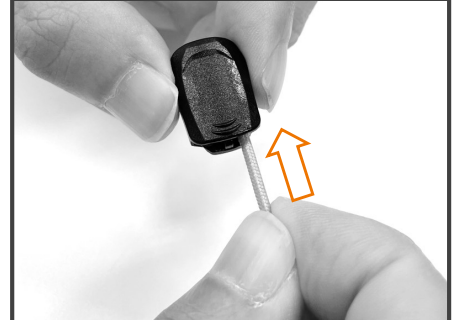


Insert the lace-tip in the direction of the arrow from Locking-slot.

■ **STEP 2** ■

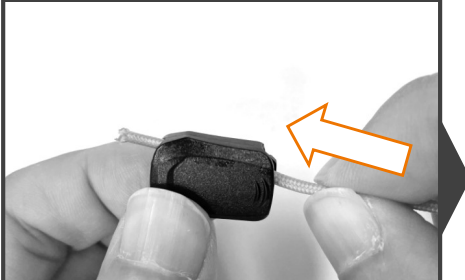


Then, continue pushing the tip until it comes out from the end of the CASE-PART.

■ **STEP 3** ■

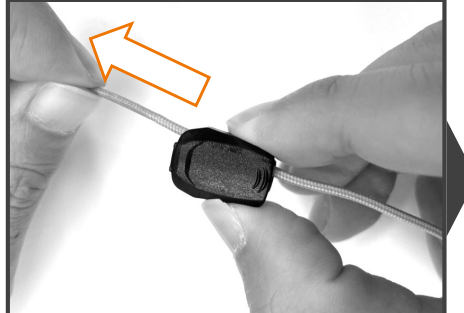

Pull out the lace-tip protruding from the end of the Case-part.

■ **STEP COMPLETED** ■

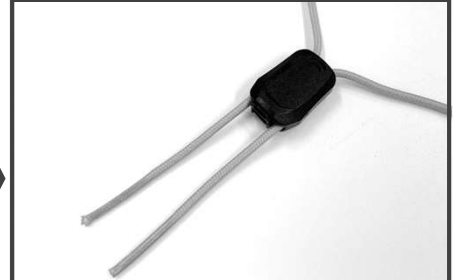

Repeat the same process on the opposite side to complete the assembly.

■ **INFORMATION** ■



ASSEMBLING TOOL FOR CLUX1A



PRESS THE BODY



PRESS TO FIX



**INSERT THE LACE
"BE AWARE OF DIRECTION"**

We provide an assembling tool for the CLUX1A to make it easier to thread the shoelace. Please contact us if necessary.