

**Products Covered by This Manual**




**Recommended shoelace:**

Flat shoelaces, width: ~6-8 mm  
Shoelace TIP outer diameter:  $\leq \phi 3.5$  mm

**HOW TO ASSEMBLE**

■ Part & Detail ■

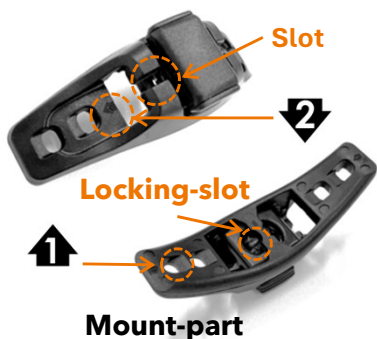

■ STEP 1 ■




Insert the lace-tip in the direction of the arrow from Locking-slot.

■ STEP 2 ■




Pull out the lace-tip and place the lace into the Slot.

■ STEP 3 ■

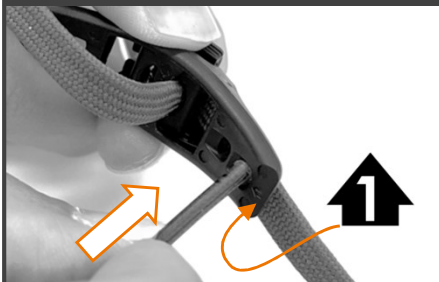


Insert the lace-tip into the hole marked "1" on the bottom side of the Mount-part.

■ STEP 4 ■

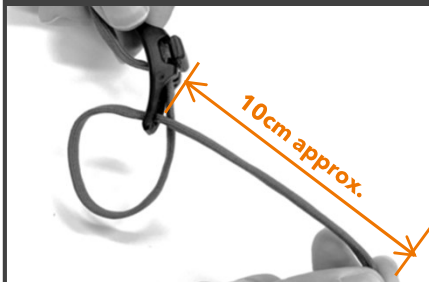

Pull out approximately 10 cm of the shoelace from the hole in STEP 3.

■ STEP 5 ■

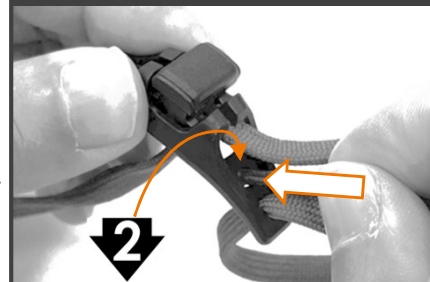

Insert the lace-tip into the hole marked "2" on the top side of the Mount-part.

■ STEP 6 ■



Pull until there is no gap between the mount and complete assembly on one side.

■ STEP COMPLETED ■



Repeat the same process on the opposite side to complete the assembly.